

TSHIELD SERIES



PRODUCT: TTS4

Tacshield polyurethane Studs are designed for the visually impaired and are a cost-effective architectural solution in place of stainless studs. Tacshield polyurethane studs are available as a discrete warning stud and directional tactile

All Polyurethane Tactile Stud Indicators are manufactured from a durable UV Stabiliser with a high strength Polyurethane component.

Tacshield polyurethane studs are able to withstand extreme pressure from heavy traffic at railway stations, shopping centres and can handle the abuse from maintenance machinery. Available in a variety of colours and feature a P5 slip resistance rating.

DIMENSIONS

Major Diameter: **35mm**
Minor Diameter: **25mm**
Stud Height: **5.0mm**
Spigot Length: **10mm** or **25mm**

LUMINANCE CONTRAST

Tacshield can visit site and schedule an onsite Luminance Test


APPLICATIONS

Tacshield Polyurethane studs can be almost installed everywhere, but are best suited to:

Concrete
Exposed Aggregate
Ceramic Tiles
Bluestone Tiles
Carpet/Lino
Bitumen/Asphalt
Timber
Rubber Vinyl
Checker Plate



COLOURS

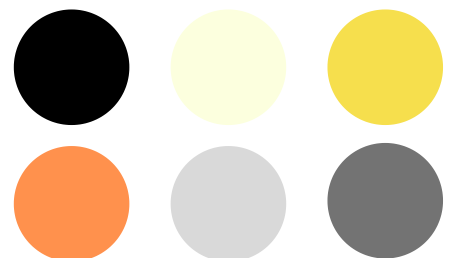

PRODUCT DATA

AS1428 Compliant: YES
AS4586 Compliant: YES
NCC Compliant: YES

AS4586-Wet Pendulum Test: W AS4586-Oil/Wet Ramp: R12, P5
Required Contrast for AS/NZS 1428.4 Luminance Test: 45%
All Tests carried out as per AS4586:2013 (appendix A)
Ultra Violet Satability: YES
Warranty Period: 10 Years
Material: Highest grade polyurethane