

TSHIELD SERIES

tacshield

PRODUCT: TTP4

Tacshield's range of ceramic tactile pads are the most economical tactile product in the marketplace with many colours currently available.

The Tacshield ceramic tactile pad is a durable porcelain tile and is resilient and has extreme UV stabiliser.

We have a range has four different colours which all comply with the Luminance Contrast Standards as set out in AS/NZ 1428.4.1:2009.

Tacshield ceramic pad thickness is 10mm and is ideal to leave 13-15mm rebate in freshly laid concrete to accommodate glue and cement, and a 2-3mm gap for grouting around the tiles.

DIMENSIONS

Major Diameter: **35mm**
Minor Diameter: **25mm**
Stud Height: **5.0mm**
Tile: **300mm x 300mm x 10mm**

LUMINANCE CONTRAST

Tacshield can visit site and schedule an onsite Luminance Test.


APPLICATIONS

Tacshield Ceramic can be almost installed everywhere, but are best suited to:

Concrete
Exposed Aggregate
Ceramic Tiles
Bluestone Tiles
Carpet/Lino
Bitumen/Asphalt
Timber
Rubber Vinyl



COLOURS

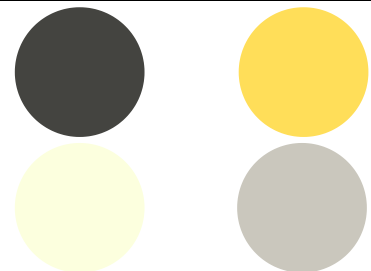

PRODUCT DATA

AS1428 Compliant: YES
AS4586 Compliant: YES
NCC Compliant: YES

AS4586-Wet Pendulum Test: W AS4586-Oil/Wet Ramp: R12, P5
Required Contrast for AS/NZS 1428.4 Luminance Test: 30%
All Tests carried out as per AS4586:2013 (appendix A)
Ultra Violet Satability: YES
Warranty Period: 10 Years
Material: Ceramic