

TSHIELD SERIES



PRODUCT: TTS1

Tacshield Stainless Steel Studs work with a proven system which reduces the installation time of an otherwise extremely time consuming process. The stainless studs are available with chemically fixed spigots. Our stainless steel products are all made from Marine grade 316 stainless steel and manufactured to current Australian Standards AS1428.4-2009.

The resistance to corrosion due to the use of the marine grade 316 means our products can withstand all harsh coastal conditions in which Australia can produce. Our design also gives the perfect aesthetic appearance as well as mechanical/chemical integrity.

The specially designed face prevents water pooling, a problem with many other products, and a potential slipping hazard.

DIMENSIONS

Major Diameter: **35mm**
Minor Diameter: **25mm**
Stud Height: **5.0mm**
Spigot Length: **12mm or 18mm**



APPLICATIONS

Tacshield stainless studs can be almost installed everywhere, but are best suited to:

- Concrete
- Exposed Aggregate
- Ceramic Tiles
- Bluestone Tiles
- Asphalt
- Carpet Tiles
- Timber
- Rubber Vinyl

LUMINANCE CONTRAST

Tacshield can visit site and schedule an onsite Luminance Test

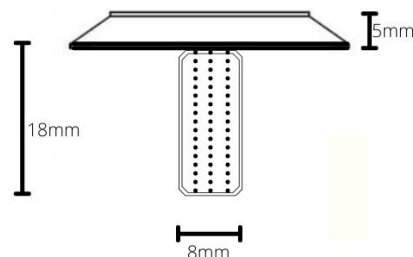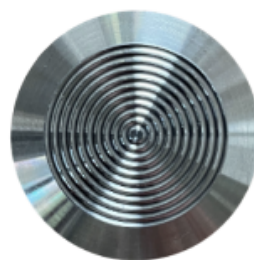

PRODUCT DATA

AS1428 Compliant: YES
AS4586 Compliant: YES
NCC Compliant: YES

AS4586-Wet Pendulum Test: W AS4586-Oil/Wet Ramp: R12, P5
Required Contrast for AS/NZS 1428.4 Luminance Test: 45%
All Tests carried out as per AS4586:2013 (appendix A)
Ultra Violet Satability: YES
Warranty Period: 10 Years
Material: 316 Stainless Steel