

# TSHIELD SERIES



## PRODUCT: TTS3

Tacshield Brass Studs is a new wave in architectural design. The brass studs are available with chemically fixed spigots and perfect for retro fitting purposes.

Our brass products are all made from high grade brass manufactured to current Australian Standards AS1428.4-2009.

A groove depth of 0.5mm is a proven method to be effective in countering any drop-off problems caused similar products.

The specially designed face prevents water pooling, a problem with many other products, and a potential slipping hazard.

### DIMENSIONS

Major Diameter: **35mm**  
Minor Diameter: **25mm**  
Stud Height: **5.0mm**  
Spigot Length: **12mm** or  
**18mm**


### LUMINANCE CONTRAST

Tacshield can visit site and schedule an onsite Luminance Test

### APPLICATIONS

Tacshield Brass studs can be almost installed everywhere, but are best suited to:

**Concrete**  
**Exposed Aggregate**  
**Ceramic Tiles**  
**Bluestone Tiles**  
**Carpet/Lino**  
**Bitumen/Asphalt**  
**Timber**  
**Rubber Vinyl**  
**Checker Plate**

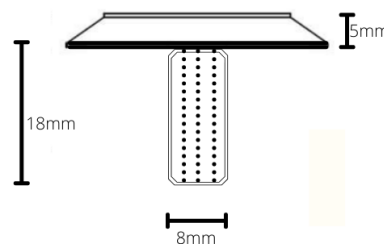

### PRODUCT DATA

AS1428 Compliant: YES  
AS4586 Compliant: YES  
NCC Compliant: YES

AS4586-Wet Pendulum Test: W AS4586-Oil/Wet Ramp: R11, P5  
Required Contrast for AS/NZS 1428.4 Luminance Test: 45%  
All Tests carried out as per AS4586:2013 (appendix A)  
Ultra Violet Satability: YES  
Warranty Period: 10 Years  
Material: Brass